



Deklin Technologies

AIU-900

Autopilot Interface Unit

Installation Manual

Rev 2.0 April 28, 2019

Deklin Technologies Inc

Tel: (615) 819-0800 Fax: (615) 819-0801
www.deklintech.com

REVISIONS

| REV | DESCRIPTION | DATE | APPROVAL |
|------------|--|----------------|-----------------|
| 1.0 | Initial Release | March 5, 2011 | JAD |
| 1.1 | Certification requirements, parts list update | April 15, 2014 | JAD |
| 1.2 | Add AIU900C, General Clean up | Nov 6, 2017 | JAD |
| 2.0 | Rmv AIU900C, Add AIU900D, Update Dwgs | Apr 28, 2019 | JAD |
| | | | |

TABLE OF CONTENTS

Section I General Information

| | |
|---------------------------------------|---|
| INTRODUCTION _____ | 1 |
| SCOPE _____ | 1 |
| EQUIPMENT DESCRIPTION _____ | 1 |
| SPECIFICATIONS _____ | 2 |
| General Specifications _____ | 2 |
| Input Specifications _____ | 2 |
| Component List _____ | 2 |
| EQUIPMENT SUPPLIED _____ | 2 |
| PARTS REQUIRED BUT NOT SUPPLIED _____ | 2 |

Section II Installation

| | |
|---------------------------------|---|
| GENERAL INFORMATION _____ | 3 |
| Scope _____ | 3 |
| Installation Requirements _____ | 3 |
| Unpacking and Inspection _____ | 3 |
| INSTALLATION PROCEDURES _____ | 3 |
| Cooling Requirements _____ | 3 |
| Mounting Requirements _____ | 3 |
| Cable harness Wiring _____ | 3 |
| Noise _____ | 4 |
| Post Installation Checks _____ | 4 |
| Operational Check Out _____ | 4 |

Section III Warranty and Service

| | |
|-----------------------|---|
| WARRANTY _____ | 5 |
| FACTORY SERVICE _____ | 5 |

Appendix A – Schematics

| | |
|----------------|---|
| AIU-900A _____ | 6 |
| AIU-900B _____ | 7 |
| AIU-900D _____ | 8 |

Appendix B – Interconnect Drawings

| | |
|--|----|
| AIU-900 SERIES INSTALLATION NOTES _____ | 9 |
| ACU TO CENTURY 1C388/388MC/388C388MC _____ | 10 |
| ACU TO CENTURY 1C388-2/388-3 _____ | 11 |
| ACU TO CENTURY NO COUPLER _____ | 12 |
| GDU620 TO CENTURY 1C388/388MC/388C388MC _____ | 13 |
| GDU620 TO CENTURY 1C388-2/388-3 _____ | 14 |
| GAD29B TO CENTURY 1C388/388MC/388C388MC _____ | 15 |
| GAD29B TO CENTURY 1C388-2/388-3 _____ | 16 |
| GDU700/1060 TO CENTURY 1C388/388MC/388C388MC _____ | 17 |
| GDU700/1060 TO CENTURY 1C388-2/388-3 _____ | 18 |

Appendix C – Mechanical

| | |
|-------|----|
| _____ | 19 |
|-------|----|

Section I General Information

INTRODUCTION

This manual contains information regarding the physical, mechanical, and electrical characteristics, plus, the installation requirements for the AIU-900 series Autopilot Interface Unit.

SCOPE

This manual provides detailed installation instructions for the AIU-900 series Autopilot Interface Unit.

EQUIPMENT DESCRIPTION

The Deklin Technologies, Inc. AIU-900 series are a pre-assembled autopilot interface unit following the interconnect specifications and component requirements recommended by the manufacturers of certain PFD systems when interfaced with existing 1C388 series autopilot couplers. It is intended to provide a convenient solution in a single device with multiple variations for installers to use in place of producing the same circuits from discrete components as specified in PFD installation manuals. The installer is responsible to certify as airworthy and determine eligibility of this product for installation IAW FAA Parts 21 and 43, IAW AC20-62E, Section 11, Paragraph a.

11. ELECTRICAL PARTS AND INSTRUMENTS.

a. Electronic Kits.

Kits assembled by non-certificated individuals are not eligible for installation on TC'd aircraft until the part is certified as airworthy and found eligible for installation in accordance with parts 21 and 43. During and after assembly, these kits should receive documented conformity inspections by properly certificated persons to ensure they meet all applicable airworthiness requirements for use on the specified aircraft on which they are to be installed. The installation of these approved units should be accomplished by or under the supervision of a properly certificated person or agency in accordance with parts 21 and 43. When the installation is a major alteration, the kit data and the data used for the alteration of the product must be approved by a representative of the Administrator. An appropriately certificated person must complete the maintenance records to ensure that the aircraft is approved and airworthy for return to service.

The AIU-900 series equipment compatibility:

- EFD1000[®] PFD to Century 1C388 series autopilot couplers.
- E5[®] PFD to Century 1C388 series autopilot couplers.
- G5[®], G500[®], and G500TXi[®] PFDs to Century 1C388 series autopilot couplers.

EFD1000 is Copyrighted by Aspen Avionics.

E5 is Copyrighted by Aspen Avionics.

G5, G500 and G500TXi are Copyrighted by Garmin International.

SPECIFICATIONS

General Specifications

| | |
|---|---|
| Case Material: | 5052H32 Aluminum Chassis and Cover |
| Dimensions: <i>(not including mating connector)</i> | 4.60" (116.8mm) X 2.56" (65.0mm) X 1.50" (38.1mm) |
| Weight: | 0.25 Lbs - 0.38 Lbs (0.11 Kg - 0.17 kg) |
| Connectors: | 25 Pin Female D-Sub Connector |
| Mounting: | Bulkhead, Four 8/32 Screws |

Input Specifications

| | |
|----------------|----------------|
| Input Voltage: | Not Applicable |
| Current: | Not Applicable |

Component List AIU-900A

| | |
|------------------|-----------------------------------|
| Capacitors: | 0.047uF Metalized Polyester, 100V |
| Inductor, Choke: | 18 mH |
| Resistors: | 10.0 kOhm 0.25W, 1% (x3) |
| Transformers: | SP-66 (x3) |

Component List AIU-900B

| | |
|------------------|--|
| Capacitors: | 0.027uF, Metalized Polyester, 100V |
| Inductor, Choke: | 27mH |
| Resistors: | 10 kOhm (x3), 100 kOhm 0.25W, 1% |
| Trim Pots: | 5 kOhm, 200 kOhm Single Turn, Side Adj |
| Transformers: | SP-66, SP67 (x2) |

Component List AIU-900D

| | |
|------------------|-----------------------------------|
| Capacitors: | 0.047uF Metalized Polyester, 100V |
| Inductor, Choke: | 18 mH |
| Resistors: | 10 kOhm 0.25W, 1% (x2) |
| Transformers: | SP-66, SP-13 |

EQUIPMENT SUPPLIED

| | | |
|---|------|----------------|
| 1 | each | AIU-900 Series |
|---|------|----------------|

PARTS REQUIRED BUT NOT SUPPLIED

| | | |
|---|------|----------------------------|
| 1 | each | AIU-900IK Installation Kit |
|---|------|----------------------------|

Section II - Installation

GENERAL INFORMATION

Scope

This section provides detailed installation and interconnection instructions for the AIU-900 Autopilot Interface Unit. Please read this manual carefully before beginning any installation to prevent damage and post installation problems. Installation of this equipment requires special knowledge and tools.

Installation Requirements

The AIU-900 requires specialized knowledge and tools for an effective installation. An appropriately rated Certified Repair Station must install this equipment in accordance with applicable regulations. Deklin Technologies, Inc warranty is not valid unless installed by an authorized FAA approved repair station. Failure to follow any of the installation instructions, or installation by a non-certified individual or agency will void the warranty and may result in a non-airworthy installation.

Unpacking and Inspection

Use care when unpacking the equipment. Inspect the unit and all the parts supplied for visible signs of shipping damage. Examine the unit for loose or broken pieces. Verify the correct quantity of components supplied with the list in Section I. If any damage claim is to be made, save the shipping material and contact the freight carrier. DO NOT return any items damaged in shipping to Deklin Technologies, Inc. Do not attempt to install a damaged unit. Equipment returned to Deklin Technologies, Inc for any other reason should be shipped in the original packaging, or other UPS approved packaging.

INSTALLATION PROCEDURES

Cooling Requirements

Forced air-cooling is not required for the AIU-900. However, the equipment should be kept away from heat sources without adequate cooling provided. (i.e. defrost or heating ducts, dropping resistors, heat producing avionics.)

Mounting Requirements

The AIU-900 must be mounted inside the pressure vessel in a temperature controlled environment unless the aircraft's service ceiling is less than 25,000 feet.

The AIU-900 must be rigidly mounted to a secure structure in accordance with FAA Advisory Circular AC 43.13-2B. The unit should be mounted in an area with adequate clearance for the unit and associated wiring.

Cable Harness Wiring

Refer to the included wiring diagrams for pin out configurations. All wires must be MIL-SPEC in accordance with current regulations. All shielded wire should be MIL-C-27500 or equivalent (with solder sleeves for shield termination) and must be used where specified. Proper stripping, shielding and soldering techniques must be used at all times.

Refer to FAA Advisory Circular AC 43.13-2B for more information. Failure to use correct techniques may result in improper operation, electrical noise, and/or unit failure. Damage caused by improper installation will void warranty.

Noise

Due to the variety and high power of equipment in today's aircraft, there is a potential for both electrical and conducted noise interference. To minimize the occurrence of noise being introduced, please follow these installation guidelines.

Do not bundle any lines from this unit with transmitter coax lines.

Do not bundle any lines from this unit with any other audio or high voltage power lines.

Do not bundle any lines from this unit with 400 Hz synchro wiring or AC power lines such as strobes or inverters.

Do not position this unit or route wiring from this unit next to any device with a strong alternating magnetic field such as an inverter.

Use shielded wire where shown and ground as indicated.

Post Installation Check

After installation wiring is complete, verify no power is on any pin and airframe ground on pin 5 only.

Operational Checkout

Follow instructions in specific OEM PFD Installation Manuals for check out procedures.

Section III – Warranty and Service

WARRANTY

Deklin Technologies, Inc. warrants this product to be free from defect in workmanship and material for a period of 24 months from the time of installation or 26 months from the factory shipping date. This warranty is valid only if the equipment is installed in an aircraft by a FAA certified avionics facility (or other ICAO agency).

If during the warranty period this unit should fail it will be at the discretion of Deklin Technologies, Inc to send a replacement unit or repair the original unit. All units must be returned to the factory for repair or replacement.

All shipping and handling charges for the return of a unit to the factory are the responsibility of the purchaser. Domestic UPS Ground shipping charges for sending an exchange or repaired unit to the customer will be the responsibility of Deklin Technologies, Inc. Any additional charges as a result of requested improved delivery time, alternate carrier, insurance, or handling costs are the responsibility of the customer. All freight, handling, insurance, brokerage fees, duties and/or taxes for shipments outside the continental United States are the responsibility of the purchaser.


Deklin Technologies, Inc shall not be liable for incidental or consequential damages. This warranty does not cover a defect that has resulted from improper installation, handling, storage or preservation, unreasonable use, or maintenance. This warranty does not cover expenses incurred for the removal and/or installation of this product.

All items repaired or replaced under this warranty are warranted for the remainder of the original warranty period. Deklin Technologies, Inc reserves the rights to make modifications or improvements to the product without obligation to perform like modifications or improvements to previously manufactured products.

FACTORY SERVICE


In the event any unit needs to be returned to the factory contact Deklin Technologies, Inc for a Return Authorization Number prior to returning. Units that arrive without a Return Authorization Number, will be returned un-repaired. Deklin Technologies, Inc is not responsible for items returned via Mail.

Appendix A - Schematics

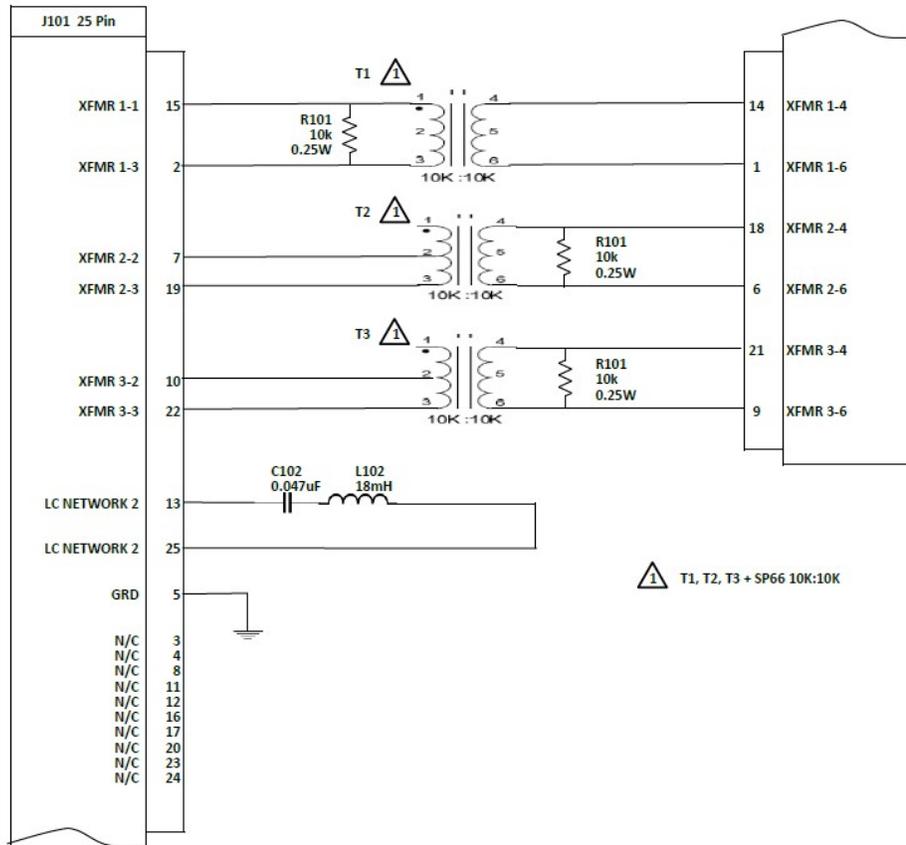

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC


| | | | | | | | |
|----------|------------|------|--|-----------|---------|-------|--------|
| DATE: | FEB 4/2019 | | Deklin Technologies | | | | |
| DRAWN BY | JAD | | www.deklintech.com | | | | |
| CHECKED | JAD | | TITLE AIU-900A AUTOPILOT INTERFACE SCHEMATIC | | | | |
| APPROVED | JAD | SIZE | A | REV. | 2.2 | SHEET | 1 of 1 |
| PART NO. | AIU-900A | FILE | DWG TYPE | SCHEMATIC | DWG NO. | | |

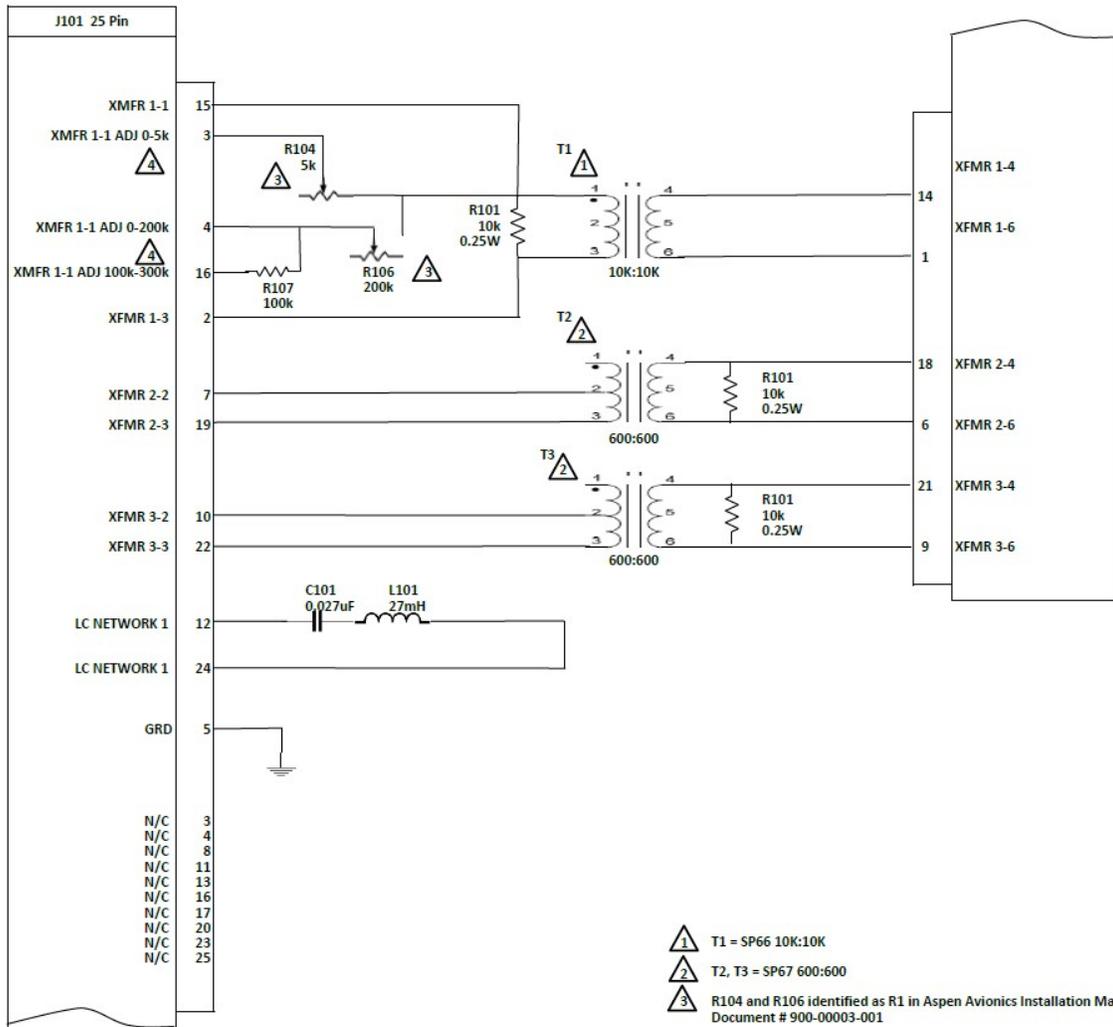

-  T1 = SP66 10K:10K
-  T2, T3 = SP67 600:600
-  R104 and R106 identified as R1 in Aspen Avionics Installation Manual Document # 900-00003-001
-  R104 Pin 3 = 0-5k Range
R106 Pin 4 = 0-200k Range
Pin 16 = 100k-300k Range
If value required is greater than 300k add external resistors

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC

| | | | | | | | |
|----------|------------|---|--|------|---------|-------|--------|
| DATE: | FEB 4/2019 |  | Deklin Technologies | | | | |
| DRAWN BY | JAD | | | | | | |
| CHECKED | JAD | | | | | | |
| APPROVED | JAD | www.deklintech.com | | | | | |
| PART NO. | AIU-900B | TITLE | AIU-900B AUTOPILOT INTERFACE SCHEMATIC | | | | |
| FILE | | SIZE | A | REV. | 2.3 | SHEET | 1 of 1 |
| | | DWG TYPE | SCHEMATIC | | DWG NO. | | |

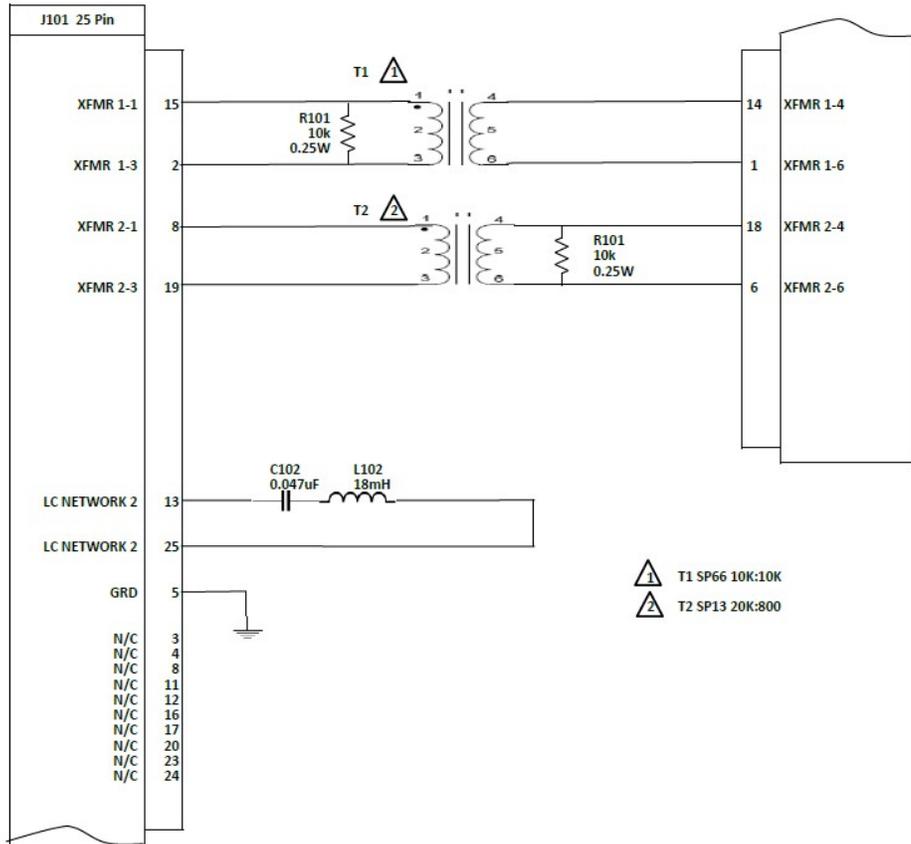

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC

| | | | | | | | |
|----------|-------------|--|------------------------------|------|---------|-------|--------|
| DATE: | FEB 15/2019 |  Deklin Technologies www.deklintech.com | | | | | |
| DRAWN BY | JAD | | | | | | |
| CHECKED | JAD | | | | | | |
| APPROVED | JAD | TITLE | AIU-900D AUTOPILOT INTERFACE | | | | |
| PART NO. | AIU-900D | SIZE | A | REV. | 1 | SHEET | 1 of 1 |
| FILE | | DWG TYPE | SCHEMATIC | | DWG NO. | | |

Appendix B – Interconnect Drawings

AIU-900 SERIES INSTALLATION NOTES

- 1 UNLESS OTHERWISE SPECIFIED BY THE MANUFACTURER OF THE DEVICE BEING INTERFACED TO, ALL WIRES SHOULD 22AWG. ALL UNSHIELDED WIRE SHALL BE SELECTED IN ACCORDANCE WITH AC43.13-1B, CHANGE 1, PARAGRAPHS 11-76 THROUGH 11-78. WIRE TYPES SHOULD BE TO MIL-W-22759 AS SPECIFIED IN AC43.13-1B, CHANGE 1, PARAGRAPHS 11-85 AND 11-86, AND, BE LISTED IN TABLE 11-11. ALL SHIELDED WIRE/CABLE SHALL BE IN ACCORDANCE WITH MIL-C-27500.

-  GROUNDED LESS THAN 1 FOOT (0.3 METERS) FROM INTERFACE CONNECTOR.

-  SHIELDS SHOULD BE GROUNDED TO AIRFRAME GROUND WITH THE SHORTEST LENGTH OF WIRE POSSIBLE.

-  THERE ARE THREE RESISTANCE RANGES AVAILABLE ON THE AIU-900B: R104 (0-5K OHM); R106 (0-200K OHM); AND R106 PLUS 100K OHM RESISTOR (100K-200K OHM). THE OPTIMAL OUTPUT PIN SHOULD BE CHOSEN FOR THE TYPE/MODEL OF THE RADIO COUPLER CONNECTED TO. REFER TO MANUFACTURER'S SPECIFICATIONS. ADDITIONAL EXTERNAL RESISTANCE MAY BE REQUIRED.
R104 AND R106 IDENTIFIED AS R1 IN ASPEN AVIONICS INSTALLATION MANUAL DOCUMENT # 900-00003-001

-  PROVIDE SHORT WIRE CONNECTION.

-  SPLICE BOTH WIRES TOGETHER INTO PIN B OF CD33 TO AMP.


- 7 THIS DEVICE IS INTENDED TO SIMPLIFY THE INTERFACE OF CERTAIN DEVICES USING SPECIFIC COMPONENTS ALREADY SPECIFIED WITHIN THE INSTALLATION MANUALS OF THESE DEVICES. THESE DRAWINGS AS THEY PERTAIN TO THESE INSTALLATIONS ARE FOR REFERENCE ONLY. REFER TO SPECIFIC MANUFACTURER'S INSTRUCTIONS FOR ACTUAL INTEGRATION.

- 8 REFER TO SPECIFIC MANUFACTURER'S DOCUMENTATION FOR AUTOPILOT INTEGRATION INFORMATION INCLUDING STC COMPLIANCE.

- 9 **THE INSTALLER IS RESPONSIBLE TO CERTIFY AS AIRWORTHY AND DETERMINE THE ELIGIBILITY OF THIS PRODUCT FOR INSTALLATION IAW FAA PARTS 21 AND PART 43, AND AC20-62E, SECTION 11, PARAGRAPH A.**

| | | | | | | | |
|----------|-------------|---|----------------------------|-------|-----|----------|--|
| DATE: | FEB 17/2019 |  | Deklin Technologies | | | | |
| DRAWN BY | JAD | | | | | | |
| CHECKED | JAD | | | | | | |
| APPROVED | JAD | TITLE AIU-900 SERIES APPENDIX - B NOTES | | | | | |
| PART NO. | | SIZE | A | REV. | 1.2 | SHEET | |
| FILE | | DWG TYPE | | NOTES | | DWNG NO. | |

For reference only. Refer to PFD Manufacturers' instructions

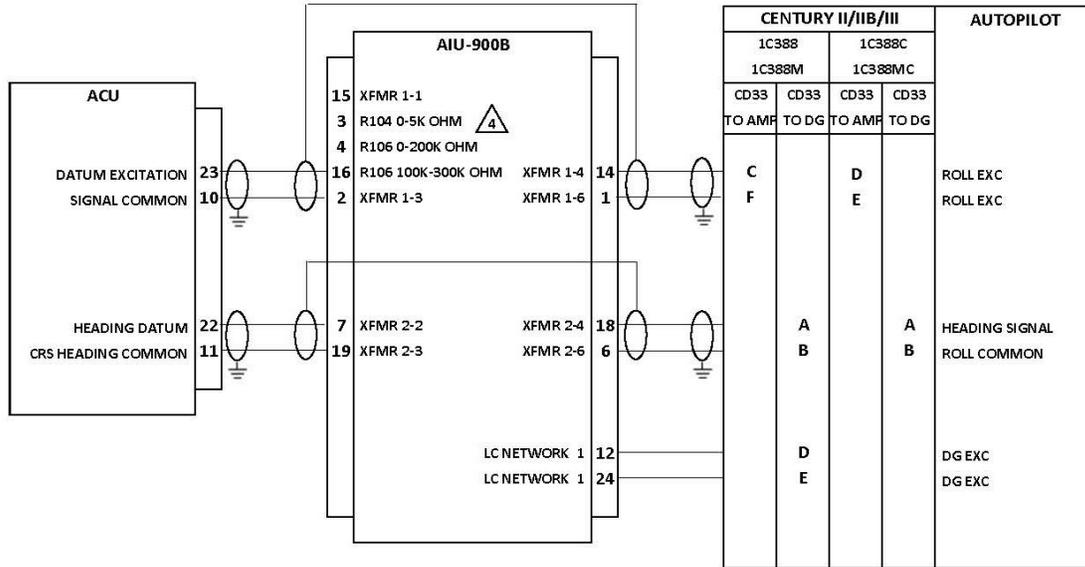


THERE ARE THREE RESISTANCE RANGES AVAILABLE ON THE AIU-900B: R104 (0-5K OHM); R106 (0-200K OHM); AND R106 PLUS 100K OHM RESISTOR (100K-200K OHM). THE OPTIMAL OUTPUT PIN SHOULD BE CHOSEN FOR THE TYPE/MODEL OF THE RADIO COUPLER CONNECTED TO. REFER TO MANUFACTURER'S SPECIFICATIONS. ADDITIONAL EXTERNAL RESISTANCE MAY BE REQUIRED.
R104 AND R106 IDENTIFIED AS RL IN ASPEN AVIONICS INSTALLATION MANUAL DOCUMENT # 900-00003-001.

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|--|
| DATE: | 20-Apr-19 |  |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | www.deklintech.com |
| PART NO. | | TITLE ACU TO CENTURY 1C388/388M/388C/388MC |
| FILE | | SIZE A RE 1 SHEET |
| | | DWG TYPE INTERCONNECT DWG NO |

For reference only. Refer to PFD Manufacturers' instructions

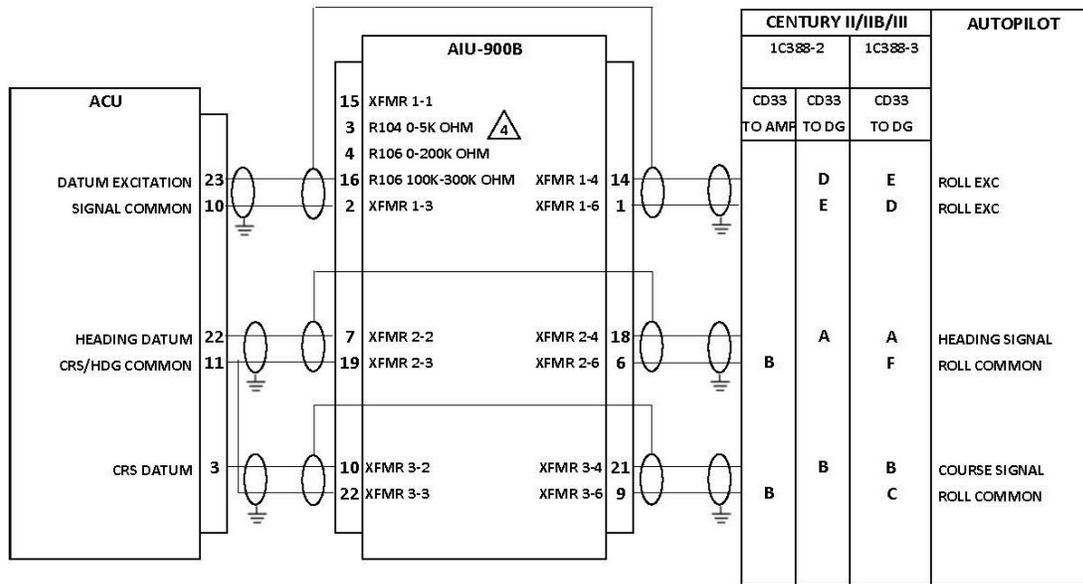


THERE ARE THREE RESISTANCE RANGES AVAILABLE ON THE AIU-900B: R104 (0-5K OHM), R106 (0-200K OHM), AND R106 PLUS 100K OHM RESISTOR (100K-200K OHM). THE OPTIMAL OUTPUT PIN SHOULD BE CHOSEN FOR THE TYPE/MODEL OF THE RADIO COUPLER CONNECTED TO. REFER TO MANUFACTURER'S SPECIFICATIONS. ADDITIONAL EXTERNAL RESISTANCE MAY BE REQUIRED.
R104 AND R106 IDENTIFIED AS RL IN ASPEN AVIONICS INSTALLATION MANUAL DOCUMENT # 900-00003-001

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|--|
| DATE: | 20-Apr-19 |  |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | www.deklintech.com |
| PART NO. | | TITLE ACU TO CENTURY 1C388-2 / 1C388-3 |
| FILE | | SIZE A RE 1 SHEET |
| | | DWG TYPE INTERCONNECT DWG NO |

For reference only. Refer to PFD Manufacturers' instructions

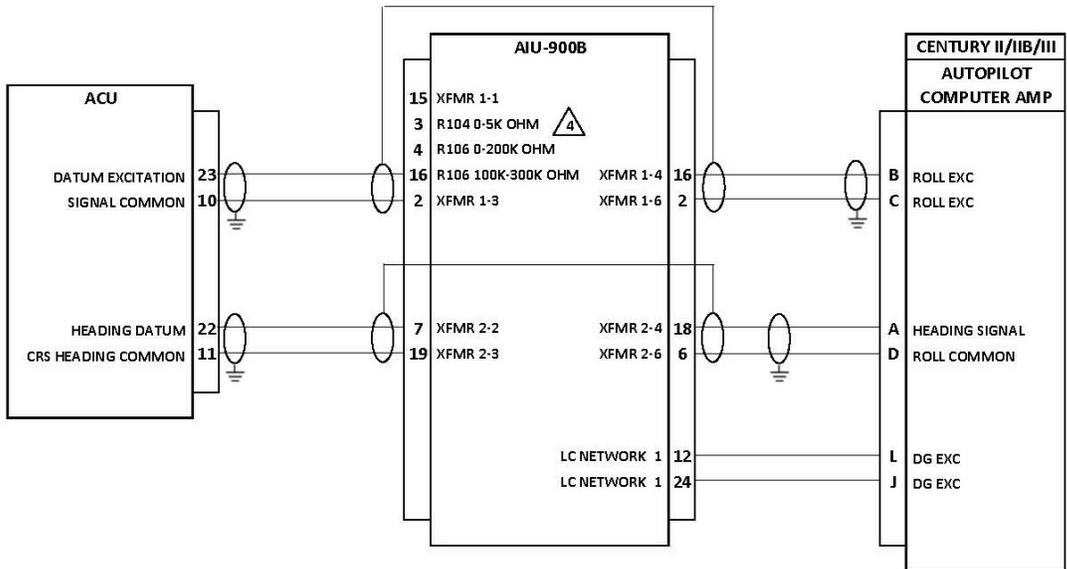


THERE ARE THREE RESISTANCE RANGES AVAILABLE ON THE AIU-900B: R104 (0-5K OHM), R106 (0-200K OHM), AND R106 PLUS 100K OHM RESISTOR (100K-200K OHM). THE OPTIMAL OUTPUT PIN SHOULD BE CHOSEN FOR THE TYPE/MODEL OF THE RADIO COUPLER CONNECTED TO. REFER TO MANUFACTURER'S SPECIFICATIONS. ADDITIONAL EXTERNAL RESISTANCE MAY BE REQUIRED.
R104 AND R106 IDENTIFIED AS R1 IN ASPEN AVIONICS INSTALLATION MANUAL DOCUMENT # 900-00003-001

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | | | | |
|----------|-----------|--|---------------------------|--------|-------|
| DATE: | 20-Apr-19 |  www.deklintech.com | | | |
| DRAWN BY | JAD | | | | |
| CHECKED | JAD | | | | |
| APPROVED | JAD | TITLE | ACU TO CENTURY NO COUPLER | | |
| PART NO. | | SIZE | A | RE' 1 | SHEET |
| FILE | | DWG TYPE | INTERCONNECT | DWG NO | |


For reference only. Refer to PFD Manufacturers' instructions

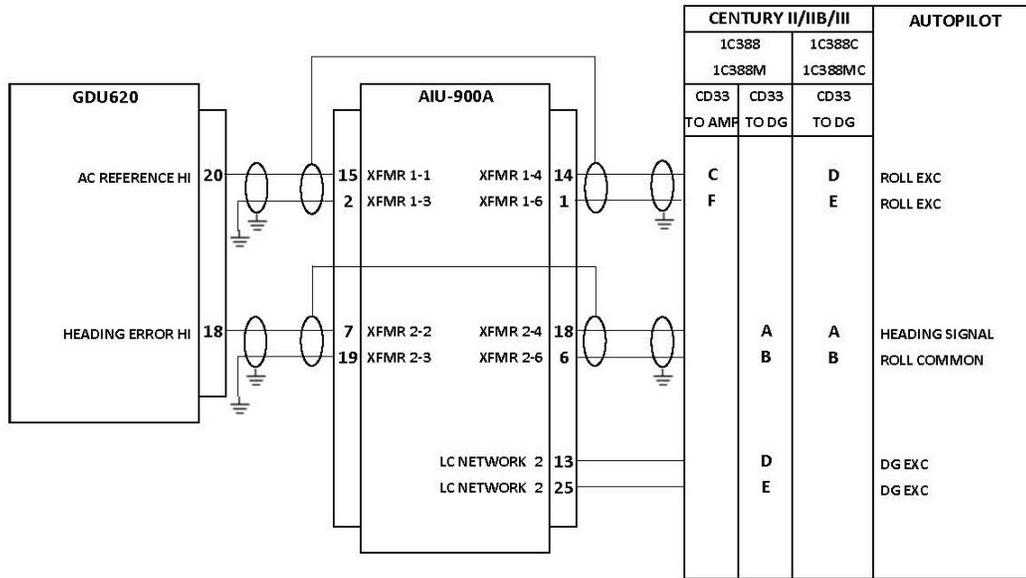

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|---|
| DATE: | 20-Apr-19 |  Deklin Technologies |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | www.deklintech.com |
| PART NO. | | TITLE GDU620 TO CENTURY 1C388/388M/388C/388MC |
| FILE | | SIZE A RE 1 SHEET |
| | | DWG TYPE INTERCONNECT DWG NO |


For reference only. Refer to PFD Manufacturers' instructions

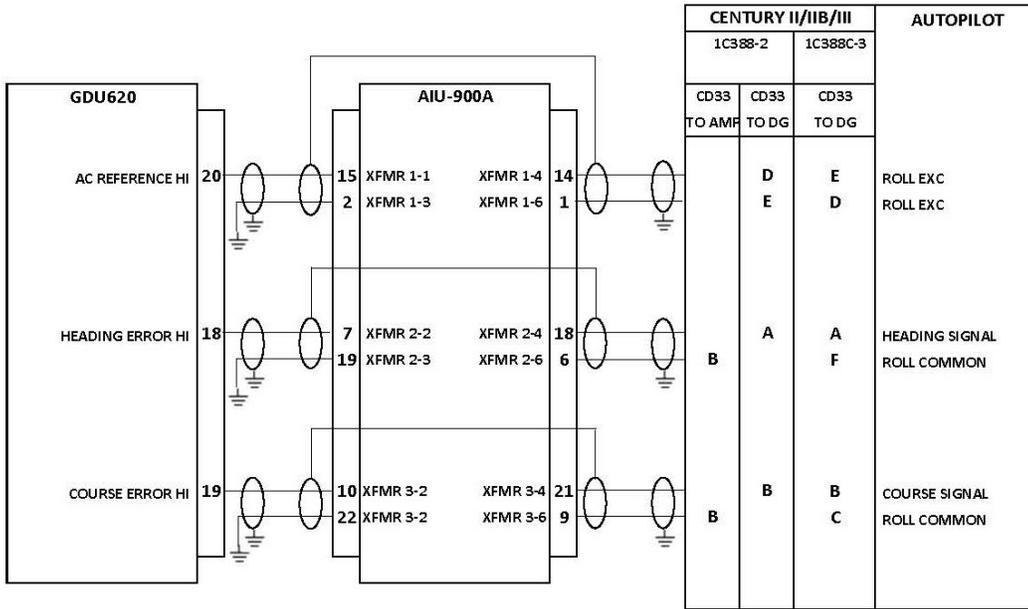

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|---|
| DATE: | 20-Apr-19 |  Deklin Technologies www.deklintech.com |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | TITLE GDU620 TO CENTURY 1C388-2 / 1C388-3 |
| PART NO. | | SIZE A REV. 1 SHEET |
| FILE | | DWG TYPE INTERCONNECT DWG NO. |


For reference only. Refer to PFD Manufacturers' instructions

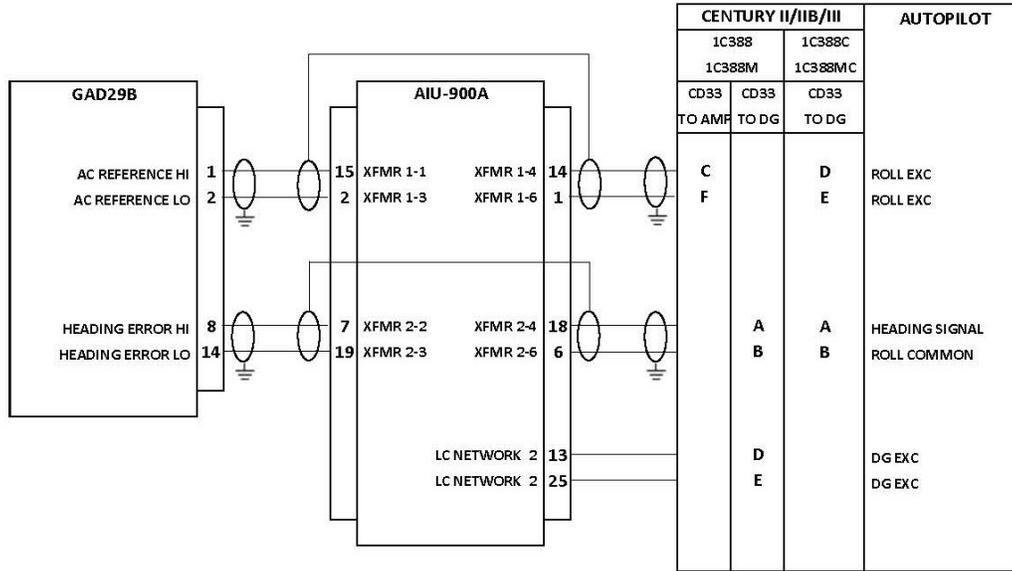

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|---|
| DATE: | 20-Apr-19 |  Deklin Technologies |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | www.deklintech.com |
| PART NO. | | TITLE GAD29B TO CENTURY 1C388/388M/388C/388MC |
| FILE | | SIZE A RE 1 SHEET |
| | | DWG TYPE INTERCONNECT DWG NO |


For reference only. Refer to PFD Manufacturers' instructions

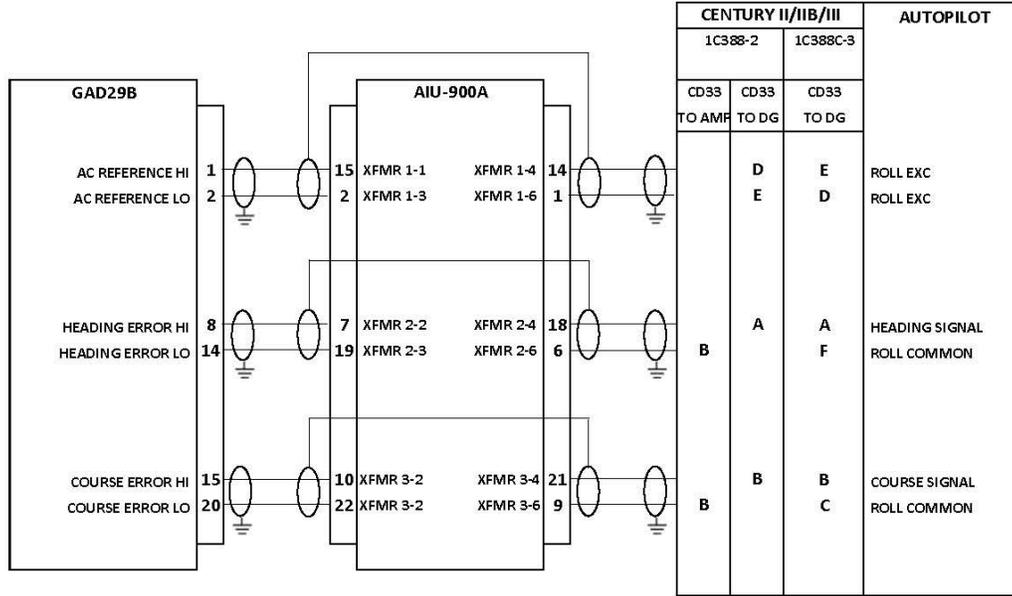

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|---|
| DATE: | 20-Apr-19 |  Deklin Technologies www.deklintech.com |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | TITLE GAD29B TO CENTURY 1C388-2 / 1C388-3 |
| PART NO. | | SIZE A RE 1 SHEET |
| FILE | | DWG TYPE INTERCONNECT DWG NO |


For reference only. Refer to PFD Manufacturers' instructions

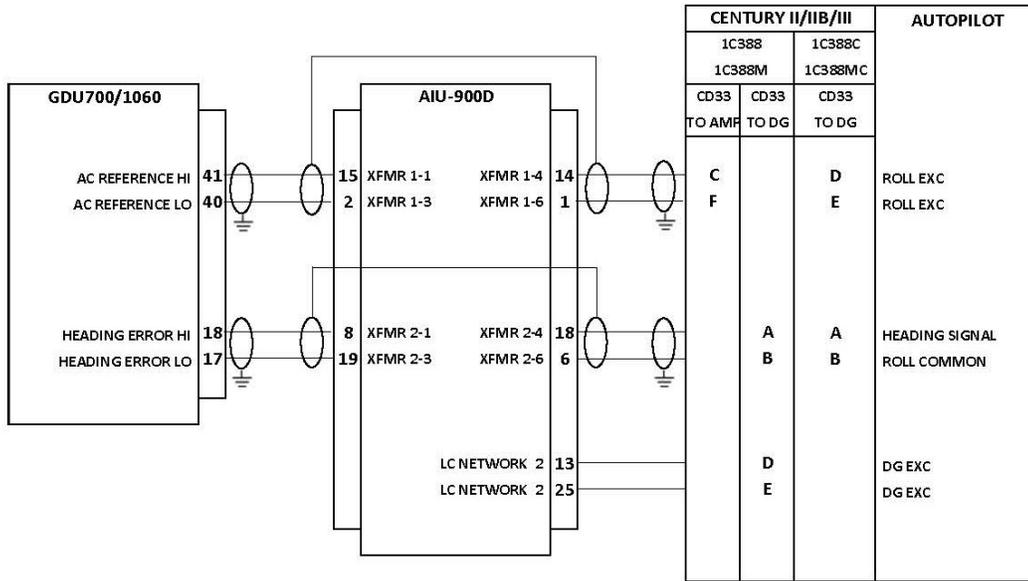

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | | | | | | |
|----------|-----------|--|--------------|----|--------|-------|--|
| DATE: | 20-Apr-19 |  | | | | | |
| DRAWN BY | JAD | | | | | | |
| CHECKED | JAD | www.deklintech.com | | | | | |
| APPROVED | JAD | | | | | | |
| PART NO. | | SIZE | A | RE | 1 | SHEET | |
| FILE | | DWG TYPE | INTERCONNECT | | DWG NO | | |


For reference only. Refer to PFD Manufacturers' instructions

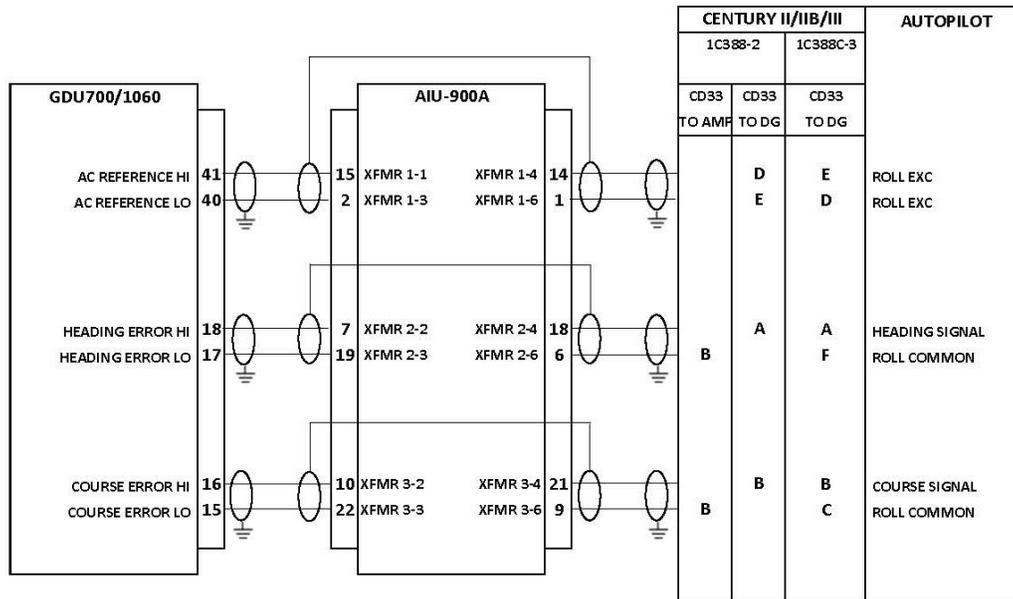

CONFIDENTIAL AND PROPRIETARY TO DEKLIN TECHNOLOGIES INC.

| | | |
|----------|-----------|---|
| DATE: | 20-Apr-19 |  Deklin Technologies |
| DRAWN BY | JAD | |
| CHECKED | JAD | |
| APPROVED | JAD | www.deklintech.com |
| PART NO. | | TITLE GDU700/1060 TO CENTURY 1C388-2 / 1C388-3 |
| FILE | | SIZE A RE 1 SHEET |
| | | DWG TYPE INTERCONNECT DWG NO |

Appendix C - Mechanical

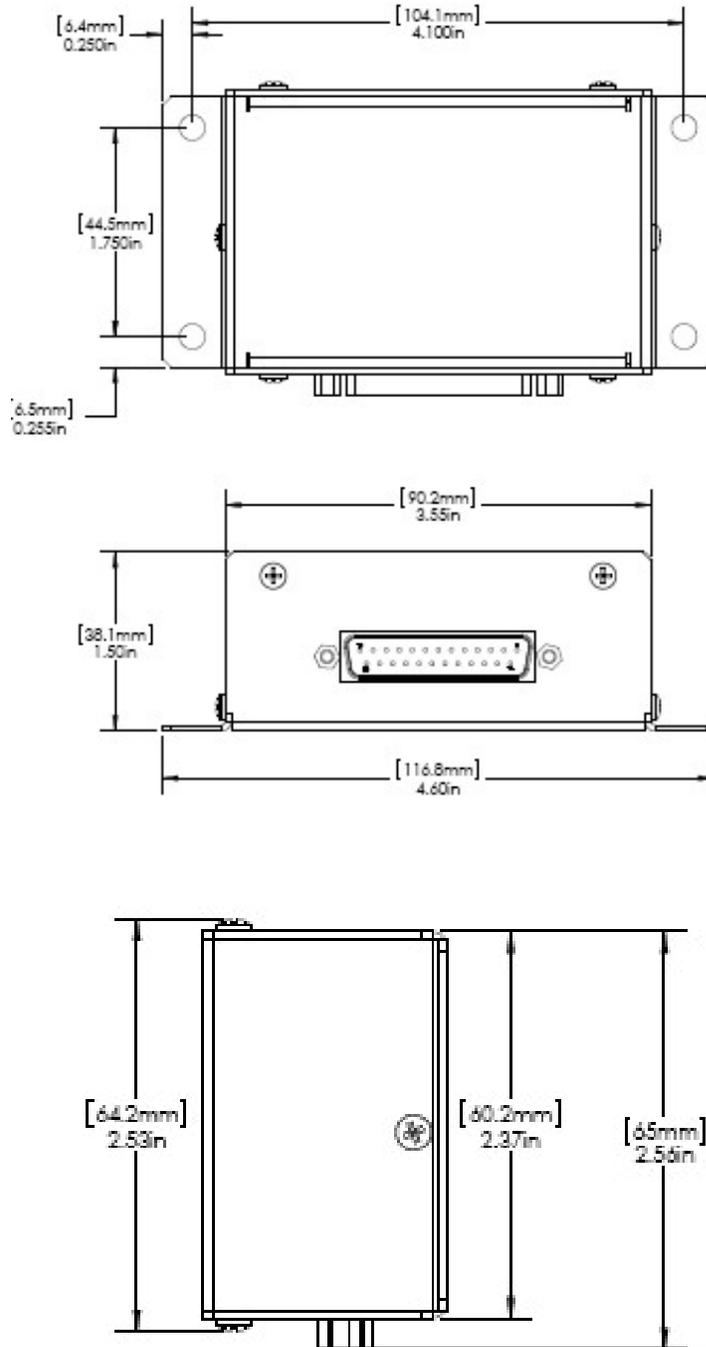

This page left blank



Deklin Technologies